

## ESD Floor Matting - Anti-Slip

A multi purpose, anti-static matting for use on either workstation benches or as a flooring solution in the workshops of advanced laboratories for microelectronic industries.

### Features:

- Made from anti-static (conductive) and static-dissipative materials with synthetic rubber
- Corrugated surface provides slip resistance and even footing
- Excellent abrasion resistance
- Easy to clean, sweep or hose off
- Resistant to cuts, tears, impact, ozone damage, fire and most chemicals
- Available in 2 / 3 and 4mm thick double-layer structure
- Surface layer is a 1mm thick static-dissipative layer
- Available in blue and yellow surface with black textured bottom surface



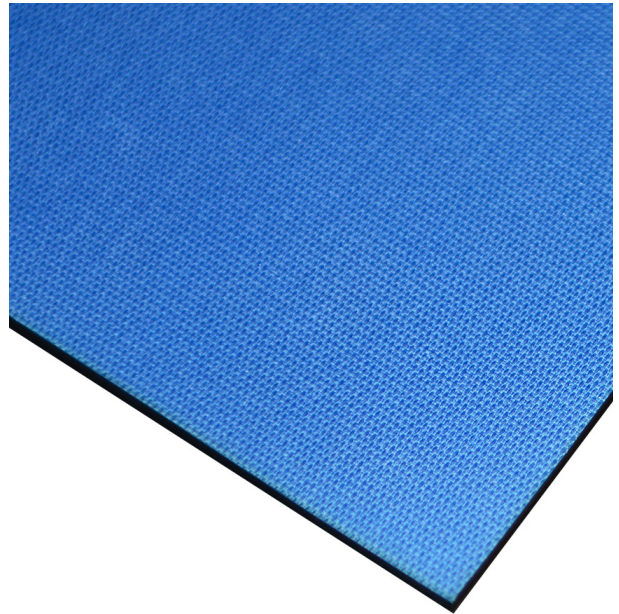


Image for illustrative purposes only, exact colour may differ slightly from shown.

### Construction

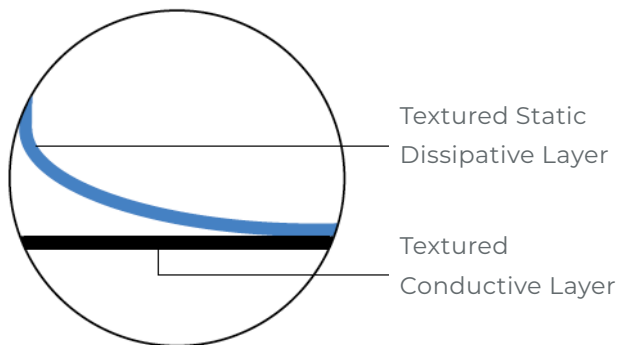

**Colour / Finish**  
Blue / Black

**Important Notice:** This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © Antistat 2020.

# ESD Floor Matting - Anti-Slip

**Fig. 1: Stud Positioning**



**Requesting Cut Mats with Studs:**

If ordering pre cut mats and you require studs to be added, please ensure that the position of the stud is specified as per Fig 1.

**Grounding:**

Sufficient ground cords should be used to reliably meet EN 61340-5-1 Table 3 less than  $1 \times 10^9$  Ohms for working surfaces. Industry recommendation is that continuous runs of ESD matting should be grounded at 10ft intervals to allow proper charge decay rates. Each individual ESD mat should be grounded with ground snaps located no further than five feet from either end.

**Cleaning:**

Please note that contact between the matting surface and any acid or alkali solvent is strictly prohibited (such as Benzene, Alcohol etc), this will result in the antistatic performance wearing away. If cleaning is required, the matting may be wiped with a cloth coated in a neutral solution (such as water).

**Guidance on use:**

Matting materials have a tendency to shrink slightly when first unrolled. In applications where length is critical, allow the material to relax for at least 4 hours before cutting to size. Matting should always be trimmed with a sharp knife or razor blade.

**Cutting tolerance:**

Width  $\pm 6$ mm

Length  $\pm 6$ mm every linear foot of running material

**RoHS Compliance:**

None of the following materials are intentionally added in manufacturing this product: lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB) or polybrominated diphenyl ethers (PBDE) as outlined in the Directive 2002/95/ EC Article 4.1.

**Important Notice:** This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © Antistat 2020.

## ESD Floor Matting - Anti-Slip

### Test Results:

	Test Method	Unit	Value
Surface Resistance / $R_{TC}$	SJ/T10694-2004	Ohms	$1 \times 10^6 \leq R \leq 1 \times 10^9$
Bottom Resistance / $R_{TT}$	SJ/T10694-2004	Ohms	$1 \times 10^3 \leq R \leq 1 \times 10^6$
Volume Resistance	GB/T14437-97	Ohms	$1 \times 10^5 \leq R \leq 1 \times 10^8$
Thickness	YY-1001	mm	Permissible Tolerance +0.1
Temperature Resistance	YY-1001	°C	180 (Instantaneous Temp)
Temperature	N/A	°C	20-26
Relative Humidity	N/A	%	40-65

$R_{TC}$  is the resistance from one point on the mat's surface to the mat's ground point, and is the fundamental electrical test for a mat. A proper  $R_{TC}$  insures that a mat can conduct charge from a point on the surface to the mat ground point. The guideline in ESD STM-4.1 for RTG is  $1 \times 10^6$  to  $1 \times 10^9$  Ohms. ANSI/ESD S-20.20 has an upper limit of  $<1 \times 10^9$  Ohms.

$R_{TT}$  is the resistance from one point on the mat's surface to another point. A proper  $R_{TT}$  insures the consistency of the mat's resistance properties. The ESD STM-4.1 guideline for  $R_{TT}$  is  $>1 \times 10^6$  Ohms.

Product Code	Description	Size	Size (ft)	Additional Notes
082-0066	ESD Anti Slip Matting - 3mm	1.2m wide / 10m length per roll	4 x 32	Blue / Black
082-0068	ESD Anti Slip Matting - 3mm	600 x 1200mm	4 x 32	Blue / Black
067-0060	Stud - Top Left	10mm Stud	-	Each
067-0061	Stud - Top Right	10mm Stud	-	Each
067-0062	Stud - Bottom Left	10mm Stud	-	Each
067-0063	Stud - Bottom Right	10mm Stud	-	Each
067-0064	Stud - All 4 corners	10mm Stud	-	Qty 4 Studs



Buy online at  
[www.antistat.com](http://www.antistat.com)



Call us on  
 +1 512-580-4220



Email us at  
[sales@antistat.com](mailto:sales@antistat.com)



Message us on Live Chat  
[www.antistat.com](http://www.antistat.com)

Important Notice: This data sheet and its contents (the "Information") belong to Antistat or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but Antistat assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where Antistat was aware of the possibility of such loss or damage arising) is excluded. © Antistat 2020.